

Multi Switch

16A

Single-phase input Static Bypass Switch

Main Features

- Full protection for consumers against mains and load failures
- Versatile to use
- 19" cabinet installation
- LCD display
- No signal connection between the Multi Switch and the power sources or consumers is necessary
- Network interface



Tel: +44 (0)1920 871077
Fax: +44 (0)1920 871337
Email: sales@cetronicpower.com


Your satisfaction is our motivation
www.cetronicpower.com

SPECIFICATIONS

MODEL	MSW-S	MSW-N
Current	16A	
INPUT		
Nominal voltage	180—276 Vac	
Nominal frequency	50 or 60 Hz	
Max. load for each input	16A	
Input sockets	2 IEC 320 (16A)	
OUTPUT		
Nominal voltage	Choice of one of the two input power sources	
Max. load for each output	4A	
Output sockets	8 IEC 320 10A	
OTHER FEATURES		
Weight (kg)	10	
Dimensions (HxWxD)	19" x 360 x 2U	
Communication	RS232 port	Ethernet port
Regulations	Overcurrent - overvoltage - undervoltage - energy back-feed	
Ambient temperature	0°C / +40°C	
Relative humidity	<95% non-condensing	
Colour	Dark grey RAL 5004	
Noise level	< 35dBA	

Specifications subject to change prior to notice

MSW (2 inputs - 8 outputs)

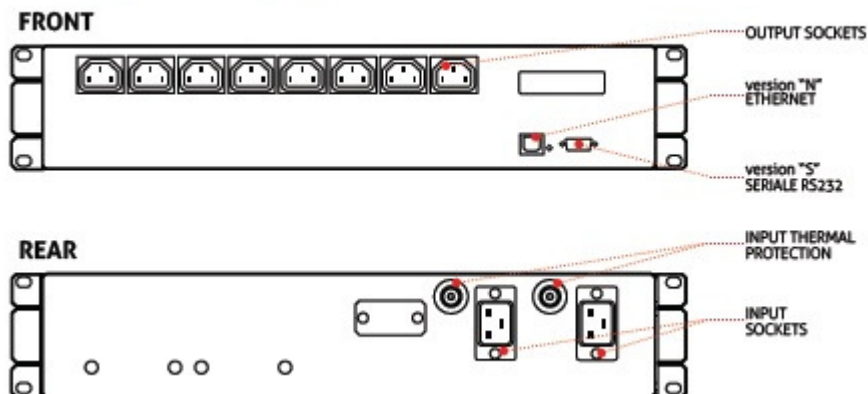

Tel: +44 (0)1920 871077
 Fax: +44 (0)1920 871337
 Email: sales@cetronicpower.com



Your satisfaction is our motivation
www.cetronicpower.com